**Technical Specifications** 

### HP P24v G5 FHD Monitor






1. Power Button

#### HP P24v G5 FHD Monitor

### **Technical Specifications**

### HP P24v G5 FHD Monitor

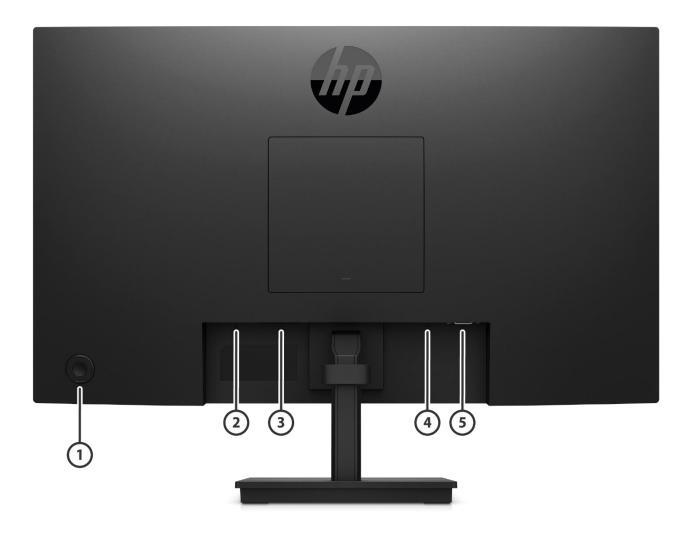

- 1. Joypad OSD button
- 2. Security Cable Slot
- 3. Power Connector

- Back
- 4. HDMI 1.4 Port
- 5. VGA Port



#### **Technical Specifications**

Model: 64W18AA

| Panel Specifications   | Display Size (Diagonal)                        | 23.8 inch   |
|------------------------|--|---|
| railet Specifications  | Panel Technology                               | VA  |
|                        | Panet recimology                               | 75Hz  |
|                        | Max Refresh Rate                               | <b>NOTE:</b> 75Hz refresh rate can be supported via HDMI and DP |
|                        |  | cable connection only. 60 Hz refresh rate with VGA.             |
|                        | Native Resolution                              | FHD (1920 x 1080)   |
|                        | Panel Bit Depth                                | 8 bit (6 bit + FRC)   |
|                        | Aspect Ratio                                   | 16:9  |
|                        | Brightness (Typical)                           | 250 nits  |
|                        | Contrast Ratio (Static)                        | 3000:1  |
|                        | Dynamic Contrast Ratio                         | 8M:1  |
|                        | Flicker Free                                   | Yes (TÜV certified)   |
|                        | Pixel Pitch                                    | 0.27 mm x 0.27 mm   |
|                        | Pixels Per Inch (PPI)                          | 93 PPI  |
|                        | Display Colors                                 | Up to 16.7 million colors supported                             |
|                        | Backlight Lamp Life Minimum (To Half           |   |
|                        | Brightness - In Hours)                         | 30k   |
|                        | Backlight Type                                 | Edge-lit  |
|                        | Screen Treatment                               | Anti-glare  |
|                        | Hardness                                       | ЗН  |
|                        | Haze   | 25%   |
|                        | Response Time (Typical)                        | 5ms GtG (with overdrive)  |
|                        | Horizontal Viewing Angle (Typical              |   |
|                        | Cr>10)   | 178°  |
|                        | Vertical Viewing Angle (Typical Cr>10)         | 178°  |
|                        | Panel Active Area Metric (W X H)               | 52.59 x 29.58 cm  |
|                        | Panel Active Area Imperial (W X H)             | 20.70 x 11.65 in  |
|                        | NOTE: Performance specifications represent the | he typical specifications provided by HP's component            |
|                        | manufacturers; actual performance may vary     | either higher or lower.   |
| Color                  | NTSC   | 72%   |
|                        | NISC   | 1278  |
| Color Management       | Color Space/ Subsampling Support               | RGB 4:4:4   |
| ···· •••               | RGB Channel Adjust                             | Yes, Gain   |
|                        | Default Color Temperature                      | Standard (6500K)  |
|                        | Factory Color Calibrated                       | Yes (Color Temperature)   |
|                        | Factory Color Presets                          | Warm - 5000K,   |
|                        | •  | Neutral - 6500K,  |
|                        |  | Cool - 9300K  |
|                        |  |   |
| Monitor Specifications | Bezel Type                                     | 3-sided borderless  |
| •                      | Color Of Stand                                 | Black   |
|                        | Color Of Head                                  | Black   |
|                        | Tilt   | -5~+23°   |
|                        | Vesa Mounting                                  | 100 mm x 100 mm   |
|                        | Security Lock                                  | Standard Security Lock Slot                                     |
|                        | Detachable Stand                               | Yes   |
|                        |  |   |

| recifical specifical       | LIOIIS   |  |
|----------------------------|--|--|
|                            | Warranty   | 3/3/0 for LA, NA, EMEA, APJ<br>(3/3/3 in select APJ Countries)   |
|                            | Low Blue Light   | Yes, (TÜV certified)   |
|                            | Management Software  | HP Display Center, HP Display Manager*<br>*Host PC requires Windows 10. HP Display Center is available on                  |
|                            |  | the Microsoft store.   |
|                            |  |  |
| On Screen Display<br>(OSD) | On Screen Display  | Brightness+, Color Control, Image Control, Input Control,<br>Power Control, Menu Control, Management, Information,<br>Exit |
|                            | Native Resolution  | FHD (1920 x 1080)  |
|                            |  | <b>NOTE:</b> HDMI 1.4 & VGA required to drive panel at its native  |
|                            |  | resolution.  |
|                            |  | The video card of the connected PC must be capable of<br>supporting 1920x1080 at 60 Hz with 8-bit color using one HDMI     |
|                            |  | or VGA.  |
|                            | Maximum Resolution   | 1920 x 1080 (FHD)  |
|                            | Preset Graphic Modes/Supported                             | 640 x 480 @ 60Hz   |
|                            | Resolutions  | 640 x 480 @ 75Hz (HDMI only)   |
|                            |  | 720 x 400 @ 70 Hz  |
|                            |  | 800 x 600 @ 60 Hz  |
|                            |  | 800 x 600 @ 75 Hz (HDMI only)  |
|                            |  | 1024 x 768 @ 60 Hz   |
|                            |  | 1024 x 768 @ 75 Hz (HDMI only)   |
|                            |  | 1280 x 720 @ 60 Hz   |
|                            |  | 1280 x 800 @ 60 Hz   |
|                            |  | 1280 x 1024 @ 60 Hz  |
|                            |  | 1280 x 1024 @ 75 Hz (HDMI only)  |
|                            |  | 1440 x 900 @ 60 Hz   |
|                            |  | 1600 x 900 @ 60 Hz   |
|                            |  | 1680 x 1050 @ 60 Hz  |
|                            |  | 1920 x 1080 @ 50 Hz (HDMI only)  |
|                            |  | 1920 x 1080 @ 60 Hz  |
|                            |  | 1920 x 1080 @ 75 Hz (HDMI only)  |
|                            | Minimum Vertical Scan Rate                                 | 48 Hz  |
|                            | Maximum Vertical Scan Rate<br>Minimum Horizontal Scan Rate | 75 Hz<br>55.6 kHz  |
|                            | Maximum Horizontal Scan Rate                               | 90.8 kHz   |
|                            | Maximum Pixel Clock  | 94.0 MHz   |
|                            | User Programmable Modes                                    | Yes, 10  |
|                            | User-Assignable Function Buttons                           | Yes, 4 (VGA: 6 options, HDMI: 5 options)   |
|                            |  | 11 (English, Spanish, German, French, Italian,   |
|                            | Languages  | Netherlands, Portuguese, Japanese, T-Chinese, S-Chinese  |
|                            |  | and Russian)   |
|                            |  | ·····  |
| <b>Connector Types</b>     | НДМІ   | 1 HDMI 1.4   |
|                            | HDCP   | Yes, HDMI  |
|                            | VGA  | 1 VGA  |
|                            |  |  |

#### HP P24v G5 FHD Monitor

| Special Features            | SWITCH                                    | Monitor Power button   |
|-----------------------------|---|--|
|                             |   | Next Active Input / Up button  |
|                             |   | Brightness / Down button   |
|                             |   | Information / Left button  |
|                             |   | Color / Right button   |
|                             |   | Menu / Enter button  |
|                             | User Presets                              | 11 (VGA) / 17 (HDMI)   |
| Power & Operating           | Power Supply                              | Internal   |
| Specs                       | Power Source                              | 100 – 240 VAC 50/60 Hz   |
|                             | Power Consumption- Max                    | 30 W   |
|                             | Energy Saving/Stand By Mode               | 0.5 W  |
|                             | Power Consumption - Typical               | 20 W   |
| Energy Star Data            | Operational Mode at 100 VAC               | 14.3 W   |
|                             | Operational Mode at 115 VAC               | 14.3 W   |
|                             | Operational Mode at 230 VAC               | 14.3 W   |
| EU Energy Efficiency        | On-mode Power Consumption for             | 1714   |
| Class (ErP LOT-5)           | Standard Dynamic Range (SDR)              | 17W  |
|                             | ErP LOT5 Energy Efficiency Class for      | Å E  |
|                             | Standard Dynamic Range (SDR)              | Ġ -  |
| <b>Operating Conditions</b> | Operating Temperature - Celsius           | 5° – 35°C  |
|                             | Operating Temperature - Fahrenheit        | 41° – 95°F   |
|                             | Non-Operating Temperature - Celsius       | –40° – 65°C  |
|                             | Non-Operating Temperature -<br>Fahrenheit | -40° – 149°F   |
|                             | Operating Humidity                        | 20 – 80% Relative Humidity (non-condensing)  |
|                             | Non-Operating Humidity                    | 5 - 95%  |
|                             | Operating Altitude                        | 0 – 5,000 m (16,400 ft.)   |
|                             | Non-operating Altitude                    | 0 - 12,192  m (40,000  ft.)  |
|                             | Non-operating Attitude                    | 0 - 12,192 (11(40,000 11.)   |
| <b>Certifications and</b>   | Mercury-free LED display backlighting     | Yes, Mercury-free LED backlighting   |
| Compliances                 | Low Halogen                               | Yes*   |
|                             |   | *External power supplies, WWAN modules, power cords, cables  |
|                             |   | and peripherals excluded.  |
|                             | Agency Approvals and Certifications       | WW application   |
|                             |   | CE,CB,KC/KCC/NOM/PSB/ICE/TUV-Bauart/ISO 9241-<br>307/TUV flicker free/ TUV LBL/ BIS/ UAE safety/ UAE |
|                             |   | RoHS/ Ukraine safety/ South Africa safety/   |
|                             |   | EAC/CSA/PSB/ISC/CCC/CEL/CECP/SEPA/TCO/TCO Certified  |
|                             |   | Edge/Energy Star/ISC/VCCI/FCC/BSMI/Vietnam   |
|                             |   | MEPS/Australian-New Zealand MEPS/WEEE/CEC  |
|                             | Microsoft WHQL Certification              | Win 11, Win 10, Win 8, Win 7   |
|                             | ENERGY STAR <sup>®</sup> Certified        | Yes, ENERY STAR®   |
|                             | EPEAT <sup>®</sup> Registered             | EPEAT <sup>®</sup> registered*   |
|                             | Regions need to verify by country         | LFLAT REGISTERE  |
|                             |   |  |



|  | China Energy Label<br>TCO Certified Edge<br>TCO Certified<br>SmartWay Transport Partnership - NA<br>only | *Based on US EPEAT® registrati<br>2018 EPEAT®. Status varies by 6<br>http://www.epeat.net for more<br>CEL Grade 2*<br>*Monitors produced from June 2<br>regulation GB 21520-2023.<br>Yes<br>Yes<br>Yes<br>Yes (NA sku) | country. Visit<br>information.   |
|--|--|--|--|
| Contains Recycled<br>Plastics          | Contains Recycled Plastics   | 85% ITE-derived closed loop<br>*Recycled plastic content perce<br>set in the IEEE 1680.1-2018 sta  | ntage is based on the definition   |
|  | Recyclable Packaging (Box, packing<br>materials)   | Molded Paper Pulp Cushion i<br>sustainably sourced and rec   | nside box is 100%<br>yclable*<br>I corrugated cushions made from   |
|  |  | <u>Metric</u>  | Imperial   |
| Unit Product/Package<br>Specifications | <b>Product Dimensions</b><br>(Unpacked with stand) (W x D x H)   | 53.89 x 18.05 x 39.78 cm   | 21.22 x 7.11 x 15.66 in  |
| Specifications                         | Product Dimensions<br>(Packed) (W x D x H)   | 59.5 x 12.4 x 39.1 cm  | 23.43 x 4.88 x 15.39 in  |
|  | <b>Display Head Dimensions</b><br>(Unpacked without stand) (W x D x H)                                   | 53.89 x 5.143 x 32.36 cm   | 21.22 x 2.02 x 12.74 in  |
|  | Base Area Footprint<br>(w x d mm)  | 173.97 x 169.97 mm   | 6.85 x 6.69 in   |
|  | Bezel Measurements   | Top: 1.4 mm  | Top: 0.55 in   |
|  | (Unpacked with stand) (W x D x H)  | Sides: 1.4 mm  | Sides: 0.55 in   |
|  |  | Bottom: 20.2 mm  | Bottom: 7.95 in  |
|  | Product Weight   | 3.57 kg  | 7.86 lb  |
|  | (Unpacked with stand)<br><b>Product Weight</b><br>(Packed)   | 5.49 kg  | 12.1 lb  |
|  | Product Weight<br>(Head Only)  | 3.17 kg  | 6.99 lb  |
| Pallet Information                     | <b>Pallet Dimensions</b><br>(L x W x H mm)   | Slip Sheet:<br>1200 x 1000 x 1967 mm<br>(20 ft &40 ft)<br>Slip Sheet:<br>1200 x 1000 x 2358 mm<br>(40 HQ)<br>Pallet:<br>1200x1000 x 2100 mm<br>(20 ft & 40 ft)<br>Pallet:  | Slip Sheet:<br>47.24 x 39.37 x77.44 inch<br>(20 ft &40 ft)<br>Slip Sheet:<br>47.24 x 39.37 x 92.83 inch<br>(40 HQ)<br>Pallet:<br>47.24 x39.37 x 82.68 inch<br>(20 ft & 40 ft)<br>Pallet: |



### Technical Specifications

| Technical Specifica  | tions   |   |   |
|--|---|---|---|
|  |   | 1200 x 1000 x 2494 mm<br>(40 HQ)  | 47.24 x 39.37 x 98.19 inch<br>(40 HQ)   |
|  | Pallet Total Weight   | Slip Sheet:<br>439.2 kg (20 ft & 40 ft)<br>Slip Sheet:<br>527.04 kg (40 HQ)<br>Pallet:<br>459.2kg (20 ft & 40 ft)<br>Pallet:<br>547.04 kg (40 HQ)   | Slip Sheet:<br>968.27 lb (20 ft & 40 ft)<br>Slip Sheet:<br>1161.92 lb (40 HQ)<br>Pallet:<br>1012.36 lb (20 ft & 40 ft)<br>Pallet:<br>1206.02 lb (40 HQ) |
|  | Pallet Layers<br>Pallet Product per Layer<br>Total Products per Pallet<br>Container Load, 20-Foot<br>Container Load, 40-Foot<br>Container Load, 40-Foot HighQ | 5 or 6 (slip sheet & pallet)<br>16 (slip sheet & pallet)<br>80 or 96 per pallet (slip shee<br>800 (slip sheet and pallet)<br>1680 sets (slip sheet and pa   | et & pallet)<br>llet)   |
| What's in the box?   | AC power cord (1.83m) 6ft<br>HDMI 1.4 cable (1.8m) 5.9ft<br>Warranty<br>Doc kit<br>Quick Setup Poster   | 2016 sets (slip sheet & palle   | 2()   |
| User Guide and User Guide Languages Arabic, Baha<br>Warranty Languages T, Czech, Da<br>French, Gerr<br>Japanese, Ka<br>Norwegian,<br>(Iberian), Ro |   | T, Czech, Danish, Dutch, Eng<br>French, German, Greek, Heb<br>Japanese, Kazakh, Korean, I<br>Norwegian, Polish, Portugue  | rew, Hungarian, Italian,<br>Latvian, Lithuanian,<br>ese (Brazilian), Portuguese<br>n, Serbian, Slovak, Slovenian,                                       |
|  | Warranty Languages  | English US (EN), English AP (EN-AP), English LA (EN-LA),<br>English UK (EN-GB), Arabic (AR) -17x, Bahasa Indonesia<br>(ID), Bosnian (BS), Bulgarian (BG), Chinese-S (CN),<br>Chinese-T (TW), Croatian (HR), Czech (CS), Danish (DA),<br>Dutch (NL), Estonian (ET), Finnish (FI), French Canadian<br>(FC), French European (FR), German (DE), Greek (EL),<br>Hebrew (HE), Hungarian (HU), Italian (IT), Japanese (JA),<br>Kazakh (KK), Korean (KO), Latvian (LV), Lithuanian (LT),<br>Norwegian (NO), Polish (PL), Portuguese, Brazilian (BR),<br>Portuguese, Iberian (PT), Romanian (RO), Russian (RU),<br>Serbian (SR), Slovak (SK), Slovenian (SL), Spanish,<br>Castilian (ES-ES), Spanish, Latin America (ES-MX),<br>Swodich (SV), Thai (TH), Turkich (TR), Ukrainian (UK) |   |



Vietnamese (VI)

Swedish (SV), Thai (TH), Turkish (TR), Ukrainian (UK),

### **Technical Specifications**

### ENVIRONMENTAL DATA

| ENVIRONMENTAL DATA                              |  |   |                                 |  |
|---|--|---|---------------------------------|--|
| Eco-Label Certifications &                      | This product has received or is i  | n the process of being certified          | to the following approvals      |  |
| declarations                                    | and may be labeled with one or   | more of these marks:                      |                                 |  |
|   | IT ECO declaration   |   |                                 |  |
|   | US ENERGY STAR <sup>®</sup>  |   |                                 |  |
|   | US Federal Energy Mar  | nagement Program (FEMP)                   |                                 |  |
|   | EPEAT <sup>a</sup> Gold registered   | d in the United States. See http:/        | //www.epeat.net for             |  |
|   | registration status in y   |   | •                               |  |
|   | TCO Certified  |   |                                 |  |
|   |  |   |                                 |  |
|   | <ul> <li>China Energy Conserva</li> <li>China State Environme</li> </ul>   | ntal Protection Administration            | (SEPA)                          |  |
|   | Taiwan Green Mark  |   |                                 |  |
|   | Korea Eco-label  |   |                                 |  |
|   | • Japan PC Green label*  |   |                                 |  |
|   |  |   |                                 |  |
| Sustainable Impact                              | • 85% ITE – derived closed loop  | plastic                                   |                                 |  |
| Specifications                                  | • Low halogen  |   |                                 |  |
| -   | <ul> <li>Outside Box and corrugated cushions are 100% sustainably sourced and recyclable</li> <li>Molded Paper Pulp Cushion inside box is 100% sustainably sourced and recyclable</li> </ul> |   |                                 |  |
|   |  |   |                                 |  |
| System Configuration                            | The configuration used for the l   | Energy Consumption and Declar             | red Noise Emissions data for    |  |
| System configuration                            | the Notebook model is based of   |   |                                 |  |
|   |  |   | UUK .                           |  |
| Energy Consumption                              |  |   |                                 |  |
| (in accordance with US ENERGY                   |  |   |                                 |  |
| STAR <sup>®</sup> test method)                  | 115VAC, 60Hz   | 230VAC, 50Hz                              | 100VAC, 50Hz                    |  |
| Normal Operation (Short idle)                   | 11.86 W  | 11.69 W                                   | 11.92 W                         |  |
| Normal Operation (Long idle)                    | 11.86 W  | 11.69 W                                   | 11.92 W                         |  |
| Sleep   | 0.21 W   | 0.26 W                                    | 0.2 W                           |  |
| Off   | 0.07 W   | 0.13 W                                    | 0.07 W                          |  |
|   |  |   |                                 |  |
|   | NOTE:  |   |                                 |  |
|   | Energy efficiency data listed is t   | for an ENERGY STAR <sup>®</sup> compliant | t product if offered within the |  |
|   | model family. HP computers marked with the ENERGY STAR® Logo are compliant with the  |   |                                 |  |
|   | applicable U.S. Environmental Protection Agency (EPA) ENERGY STAR® specifications for  |   |                                 |  |
|   | computers. If a model family does not offer ENERGY STAR® compliant configurations, then  |   |                                 |  |
|   | energy efficiency data listed is for a typically configured PC featuring a hard disk drive, a  |   |                                 |  |
|   | high efficiency power supply, a  | nd a Microsoft Windows® operat            | ting system.                    |  |
| Heat Discipation*                               | 115VAC 604-  |   |                                 |  |
| Heat Dissipation* Normal Operation (Short idle) | 115VAC, 60Hz   | <b>230VAC, 50Hz</b><br>40 BTU/hr          | 100VAC, 50Hz                    |  |
|   | 40.6 BTU/hr  |   | 40.8 BTU/hr                     |  |
| Normal Operation (Long idle)                    | 40.6 BTU/hr  | 40 BTU/hr                                 | 40.8 BTU/hr                     |  |
| Sleep   | 0.7 BTU/hr   | 0.9 BTU/hr                                | 0.7 BTU/hr                      |  |
| Off   | 0.2 BTU/hr   | 0.4 BTU/hr                                | 0.2 BTU/hr                      |  |
|   | * <b>NOTE:</b> Heat dissipation is calculevel is attained for one hour.  | ılated based on the measured w            | vatts, assuming the service     |  |



| Longevity and Upgrading | This product can be upgraded, possibly extending its useful life by several years.<br>Upgradeable features and/or components contained in the  |   |                                |  |
|-------------------------|--|---|--------------------------------|--|
|                         | Opgradeable  |   |                                |  |
|                         | Spare parts are available throughout the warranty period and or for up to "5" years after the end of production.   |   |                                |  |
| Additional Information  |  | s product is in compliance with the Restrictions of H<br>ective - 2011/65/EC.   | azardous Substances (RoHS)     |  |
|                         |  | s HP product is designed to comply with the Waste B<br>ipment (WEEE) Directive – 2002/96/EC.  | Electrical and Electronic      |  |
|                         | Safe   | s product is in compliance with California Propositio<br>e Drinking Water and Toxic Enforcement Act of 198  | 6).                            |  |
|                         |  | s product is in compliance with the IEEE 1680 (EPEA<br>www.epeat.net  | T) standard at the Gold level, |  |
|                         | • Plastics parts weighing over 25 grams used in the product are marked per ISO11469 and ISO1043.   |   |                                |  |
|                         | • This   | s product is 98.9% recycle-able when properly disp  | osed of at end of life.        |  |
| Packaging Materials     | External:  | PAPER/Paperboard  | 547 g                          |  |
|                         |  | PAPER/Molded Pulp   | 987 g                          |  |
|                         | Internal:  | PLASTIC/Polyethylene high density - HDPE  | 40 g                           |  |
|                         | The plastic packaging material contains at least 0.0% recycled content.  |   |                                |  |
| RoHS Compliance         | extend the re<br>(RoHS) Direct<br>developmen<br>We believe the<br>industry-wice<br>additional sub<br>legislation the<br>We met our work<br>requirements<br>the scope of<br>continue to e | <ul> <li>The corrugated paper packaging materials contains at least 90% recycled content.</li> <li>HP Inc. complies fully with materials regulations. We were among the first companies to extend the restrictions in the European Union (EU) Restriction of Hazardous Substances (RoHS) Directive to our products worldwide through the HP GSE. HP has contributed to the development of related legislation in Europe, as well as China, India, and Vietnam.</li> <li>We believe the RoHS directive and similar laws play an important role in promoting industry-wide elimination of substances of concern. We have supported the inclusion of additional substances—including PVC, BFRs, and certain phthalates—in future RoHS legislation that pertains to electrical and electronics products.</li> <li>We met our voluntary objective to achieve worldwide compliance with the new EU RoHS requirements for virtually all relevant products by July 2013, and we will continue to extend the scope of the commitment to include further restricted substances as regulations continue to evolve.</li> <li>To obtain a copy of the HP RoHS Compliance Statement, see HP RoHS position statement.</li> </ul> |                                |  |
| Material Usage          | (refer to the  | does not contain any of the following substances in HP General Specification for the Environment at hp.com/hpinfo/globalcitizenship/environment/sup   |                                |  |
|                         |  | estos<br>tain Azo Colorants   |                                |  |



|                            | Certain Brominated Flame Retardants – may not be used as flame retardants in  |
|----------------------------|---|
|                            | plastics  |
|                            | Cadmium   |
|                            | Chlorinated Hydrocarbons  |
|                            | Chlorinated Paraffins   |
|                            | Bis(2-Ethylhexyl) phthalate (DEHP)  |
|                            | Benzyl butyl phthalate (BBP)  |
|                            | Dibutyl phthalate (DBP)   |
|                            | Diisobutyl phthalate (DIBP)   |
|                            | Formaldehyde  |
|                            | Halogenated Diphenyl Methanes   |
|                            | Lead carbonates and sulfates  |
|                            | Lead and Lead compounds   |
|                            | Mercuric Oxide Batteries  |
|                            | Nickel – finishes must not be used on the external surface designed to be   |
|                            | frequently handled or carried by the user.  |
|                            | Ozone Depleting Substances  |
|                            | Polybrominated Biphenyls (PBBs)   |
|                            | Polybrominated Biphenyl Ethers (PBBEs)  |
|                            | Polybrominated Biphenyl Oxides (PBBOs)  |
|                            | Polychlorinated Biphenyl (PCB)  |
|                            | Polychlorinated Terphenyls (PCT)  |
|                            | • Polyvinyl Chloride (PVC) – except for wires and cables, and certain retail packaging  |
|                            | has been voluntarily removed from most applications.  |
|                            | Radioactive Substances  |
|                            | • Tributyl Tin (TBT), Triphenyl Tin (TPT), Tributyl Tin Oxide (TBTO)  |
|                            |   |
| Packaging Usage            | HP follows these guidelines to decrease the environmental impact of product packaging:  |
|                            | <ul> <li>Eliminate the use of heavy metals such as lead, chromium, mercury and cadmium<br/>in packaging materials.</li> </ul> |
|                            | • Eliminate the use of ozone-depleting substances (ODS) in packaging materials.   |
|                            | Design packaging materials for ease of disassembly.   |
|                            | Maximize the use of post-consumer recycled content materials in packaging   |
|                            | materials.  |
|                            | • Use readily recyclable packaging materials such as paper and corrugated materials.  |
|                            | Reduce size and weight of packages to improve transportation fuel efficiency.   |
|                            | Plastic packaging materials are marked according to ISO 11469 and DIN 6120  |
|                            | standards.  |
| End-of-life Management and | HP offers end-of-life HP product return and recycling programs in many geographic areas.                                      |
| Recycling                  | To recycle your product, please go to: http://www.hp.com/go/reuse-recycle or contact your                                     |
| necycung                   | nearest HP sales office. Products returned to HP will be recycled, recovered or disposed of                                   |
|                            | in a responsible manner.  |
|                            |   |
|                            | The EU WEEE directive (2002/95/EC) requires manufacturers to provide treatment  |
|                            | information for each product type for use by treatment facilities. This information (product                                  |
|                            | disassembly instructions) is posted on the Hewlett Packard web site at:   |



|   | http://www.hp.com/go/recyclers. These instructions may be used by recyclers and other<br>WEEE treatment facilities as well as HP OEM customers who integrate and re-sell HP<br>equipment.  |
|---|--|
| HP, Inc. Corporate<br>Environmental Information | For more information about HP's commitment to the environment:   |
|   | Global Citizenship Report<br>http://www.hp.com/hpinfo/globalcitizenship/gcreport/index.html<br>Eco-label certifications<br>http://www8.hp.com/us/en/hp-information/environment/ecolabels.html<br>ISO 14001 certificates:<br>http://h20195.www2.hp.com/V2/GetDocument.aspx?docname=c04755842<br>and<br>http://www.hp.com/hpinfo/globalcitizenship/environment/pdf/cert.pdf  |
| footnotes                                       | <ul> <li>Percentage of ocean-bound plastic contained in each component varies by product</li> <li>Recycled plastic content percentage is based on the definition set in the IEEE 1680.1-2018 standard.</li> <li>External power supplies, WWAN modules, power cords, cables and peripherals excluded.</li> <li>100% outer box packaging and corrugated cushions made from sustainably sourced certified and recycled fibers.</li> <li>Fiber cushions made from 100% recycled wood fiber and organic materials.</li> <li>Plastic cushions are made from &gt;90% recycled plastic.</li> </ul> |

### **Technical Specifications**

© Copyright 2024 HP Development Company, L.P. The information contained herein is subject to change without notice. The only warranties for HP products and services are set forth in the express warranty statements accompanying such products and services. Nothing herein should be construed as constituting an additional warranty. HP shall not be liable for technical or editorial errors or omissions contained herein.

Microsoft and Windows are registered trademarks or trademarks of Microsoft Corporation in the U.S. and/or other countries. ENERGY STAR is a registered trademark owned by the U.S. Environmental Protection Agency.



### Summary

| Change Log       |          |         |   |  |
|------------------|----------|---------|---|--|
|                  |          |         |   |  |
| July 22, 2022    | V1 to V2 | Updated | Pallet Information                                |  |
| July 28, 2022    | V2 to V3 | Updated | Pallet Information and Contains Recycled Plastics |  |
| March 6, 2023    | V3 to V4 | Added   | Mercury-free LED display backlighting             |  |
| April 12, 2023   | V4 to V5 | Updated | Color Management section                          |  |
| February 1, 2024 | V5 to V6 | Added   | Panel Specifications Section                      |  |
| April 3, 2024    | V6 to V7 | Added   | Footnote to CEL grade spec                        |  |
| April 15, 2024   | V7 to V8 | Updated | China Energy Label                                |  |
|                  |          |         |   |  |

